


Hanging scheme (Surface material: 6063 aluminum oxide, stainless steel, copper nickel plated and other outdoor corrosion resistant materials)

CEILING INSTALLATION



BURIED INSTALLATION



mounted rotatable scheme (suitable for surface installation, outdoor contour lighting project)

1. ceiling, wall and ground integrated installation scheme, color uniform, no color difference
2. double extrusion process together, scratch resistant protective layer, wear resistant surface,
3. imported acrylic lampshade, anti UV anti yellowing effect
4. the lampshade adopts sealing thickening process, protection level: IP67/IK10

Plain installation and hiding cable scheme (suitable for narrow seam installation, wiring is hidden in lamp body, more concise)


LED LINEAR LIGHT CUL/CWL-OP-2933

- Small size
- Structural waterproof
- Easy maintenance
- Composite installation of ceiling, wall and ground
- A variety of control mode optional, DMX,0-10V, DALI, steady on, etc
- Wear resistant surface, imported acrylic lampshade, better anti UV anti yellowing effect



LED LINEAR LIGHT
CUL/CWL-OP-2933

TPK®

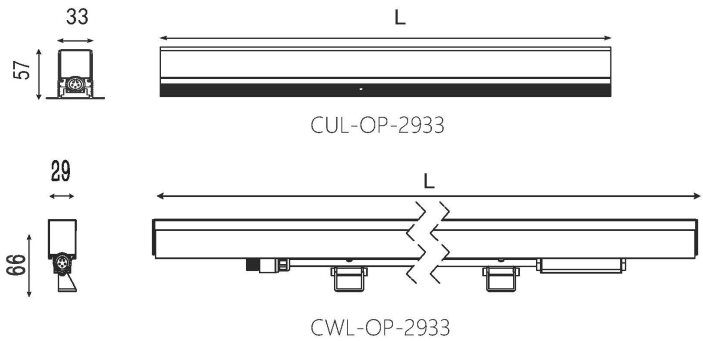

Model	Length	Power(Max)	Colours	Lumen	Mounted Type	Control	Chips Brand	Package
CWL-OP 2933-L5	L500mm	7W	2700K/3000K 4000K/5700K R+G+B RGBW	420lm 175lm	Surface Mounted	DMX ON/OFF Tunable White	EPISTAR OSRAM CREE San'an BRIDGELUX LUMILEDS	0.38±5%Kg 36 Units/Ctn 103.5*32* 20.5CM
CWL-OP 2933-L10	L1000mm	14W	2700K/3000K 4000K/5700K R+G+B RGBW	840lm 350lm				0.76±5%Kg 18 Units/Ctn 103.5*32* 20.5CM
CUL-OP 2933-L5	L500mm	7W	2700K/3000K 4000K/5700K R+G+B RGBW	420lm 175lm	Recessed Mounted	DALI 0-10V	San'an BRIDGELUX LUMILEDS	0.5±5%Kg 30 Units/Ctn 103.5*32* 26.5CM
CUL-OP 2933-L10	L1000mm	14W	2700K/3000K 4000K/5700K R+G+B RGBW	840lm 350lm				1.0±5%Kg 15 Units/Ctn 103.5*32* 26.5CM

24
VDC

IP67

RGBW

-20°C~45°C

IK10

CE