



LED WALL WASHER
LWW-ROWS-W150



- Tight waterproof structure
- International standard DMX512 control
- IP65 waterproof connectors
- Detachable bracket for easy installation
- Optional Optic LENS

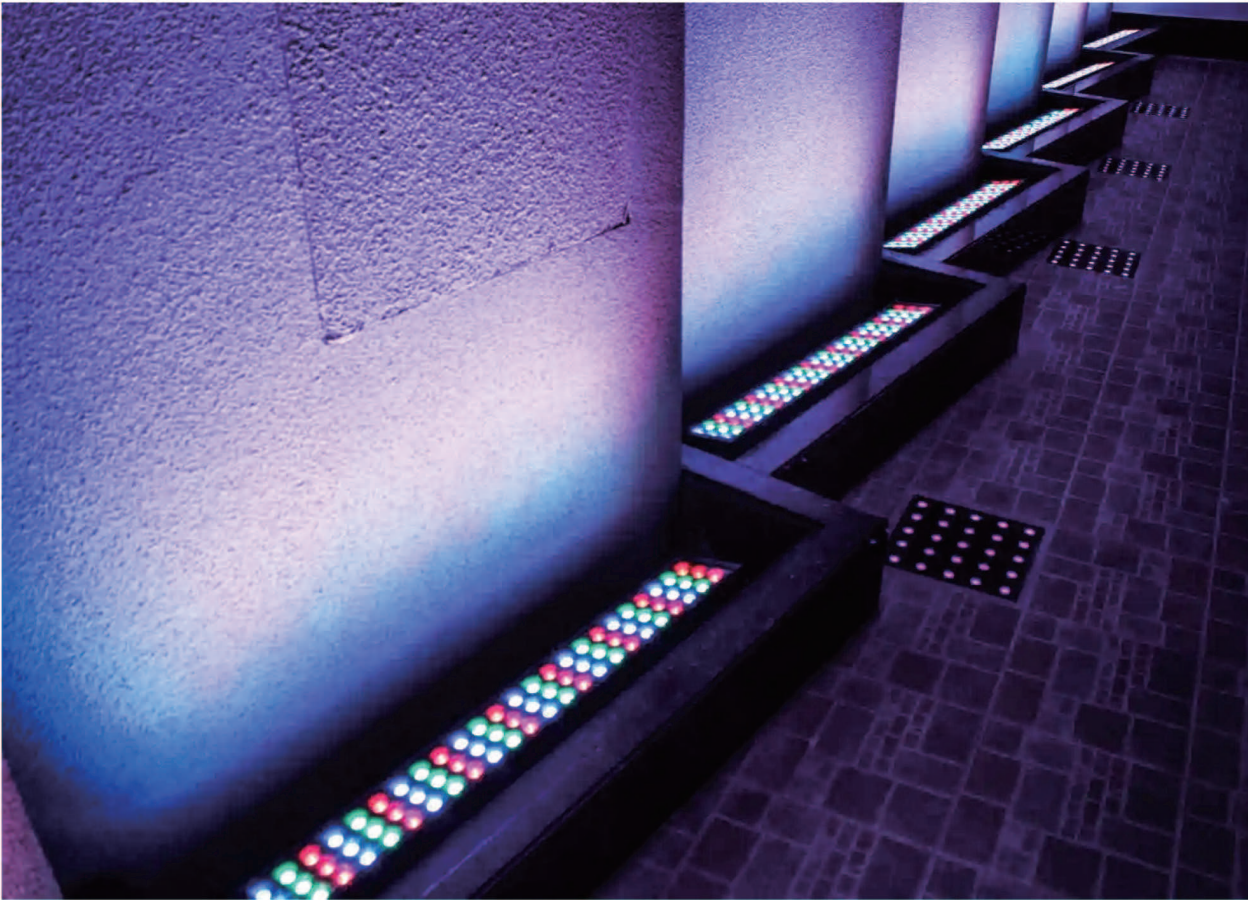

Physical&Installation Dimensions

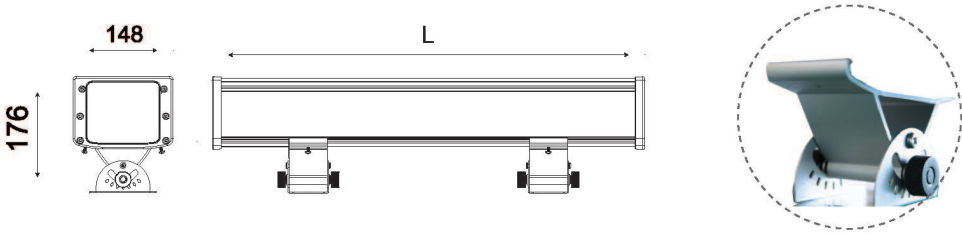

Model Info&Specifications

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LWW-ROWS-W150-L3	L330mm	40W	2700K/3000K 4000K/5700K	2500lm	15° /30° /45°	 	EPISTAR	3.0±5%Kg 4 Units/Ctn 81x49x26 CM
			R+G+B RGBW	1200lm 1400lm				
LWW-ROWS-W150-L6	L640mm	70W	2700K/3000K 4000K/5700K	4300m	60° /20x40°		OSRAM  CREE 	6.4±5%Kg 2 Units/Ctn 71x49x26CM
			R+G+B RGBW	2100lm 2550m				
LWW-ROWS-W150-L12	L1240mm	140W	2700K/3000K 4000K/5700K	5800lm	15x55°	 	San'an  BRIDGELUX  LUMILEDS 	10.0±5%Kg 1 Units/Ctn 130x23.5x24CM
			R+G+B RGBW	3300lm 3800lm				

