

TPK®

LED WALL WASHER


LWW-WZB-W60



- Tight waterproof structure to IP66
- International standard DMX512 control
- IP68 waterproof connectors
- Detachable bracket for easy installation
- Optional Optic LENS



Physical&Installation Dimensions

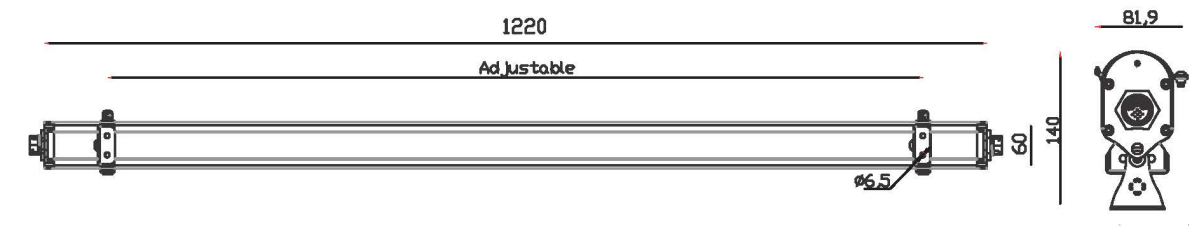

Model Info&Specifications

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LWW-WZB-W60-L3	L305mm	25W	2700K/3000K 4000K/5700K	1600lm	10° /20° /40°	DMX RDM	EPISTAR	1.05±5%Kg 8 Units/Ctn 65x20x30CM
			R+G+B RGBW	900lm 1050lm				
LWW-WZB-W60-L3-L6	L610mm	50W	2700K/3000K 4000K/5700K	3000m	60° /15x40°	ON OFF	OSRAM	1.75±5%Kg 4 Units/Ctn 65x20x30CM
			R+G+B RGBW	1700lm 2000m				
LWW-WZB-W60-L12	L1220mm	85W	2700K/3000K 4000K/5700K	5800lm	15x55°	Tunable White	CREE	3.15±5%Kg 4 Units/Ctn 125x20x30CM
			R+G+B RGBW	3300lm 3800lm				

100-277
VAC

100-240
VAC

RGBW

-20°C~45°C

IP65