



Various anti-glare shields can be optional upon request

Anti-glare baffle

Luminous efficacy up to 130 lm/W



Support high voltage power supply, easy to installation


LED WALL WASHER LWW-PZT-W38A

- Graduated bracket, structural waterproof,
- Easy to maintain
- Multiple control mode, high lumen value,
- A variety of anti-glare design





LED WALL WASHER
LWW-PZT-W38A

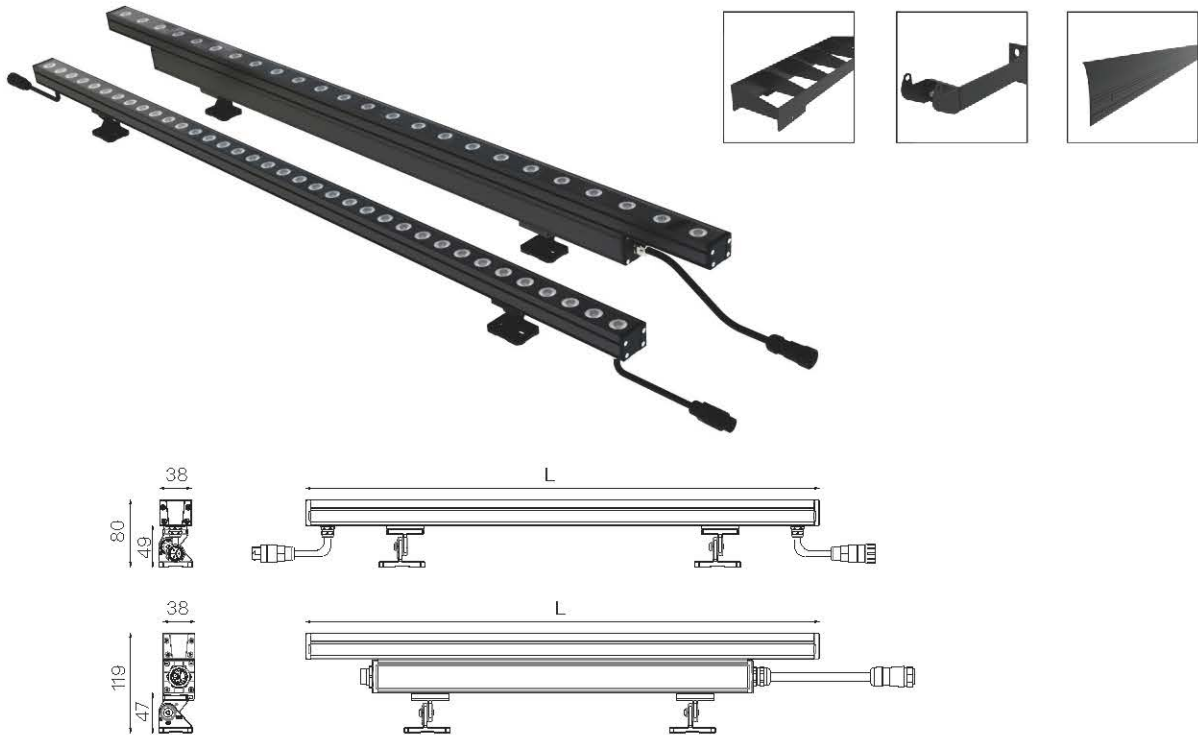

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LWW-PZT-W38A-L3	L314mm	9W	2700k/3000k 4000k/6000k R+G+B RGBW	1170 lm 405 lm	15°/30° /45°/60° 10°45° 15°55° 20°40°	DMX RDM ON OFF Tunable White DALI 0-10V	EPISTAR OSRAM CREE San'an LUMILEDS	1.1Kg±5% 16 Units/Ctn 71.5*31*32.5CM
LWW-PZT-W38A-L5	L507mm	18W	2700k/3000k 4000k/6000k R+G+B RGBW	2340 lm 810 lm				1.4Kg±5% 12 Units/Ctn 55.5*45.5*32.5CM
LWW-PZT-W38A-L6	L615mm		2700k/3000k 4000k/6000k R+G+B RGBW	2340 lm 810 lm				1.6Kg±5% 12 Units/Ctn 66.5*45.5*32.5CM
LWW-PZT-W38A-L10	L1002mm	36W	2700k/3000k 4000k/6000k R+G+B RGBW	4680 lm 1620 lm				2.2Kg±5% 8 Units/Ctn 105.5*31*32.5CM
LWW-PZT-W38A-L12	L1218mm		2700k/3000k 4000k/6000k R+G+B RGBW	4680 lm 1620 lm				2.5Kg±5% 8 Units/Ctn 127*31*32.5CM

24 VDC

100-240 VAC

100-277 VAC

IP66

RGBW Multiple colors

-20°C~40°C