



LED LINEAR LIGHT/ UNDERGROUND LIGHT

CUL/CWL
-OP-2933

- Small size
- Structural waterproof
- Easy maintenance
- Composite installation of ceiling, wall and ground
- A variety of control mode optional, DMX, 0-10V, DALI, steady on, etc
- Wear resistant surface, imported acrylic lampshade, better anti UV anti yellowing effect



SURFACE
MOUNTED

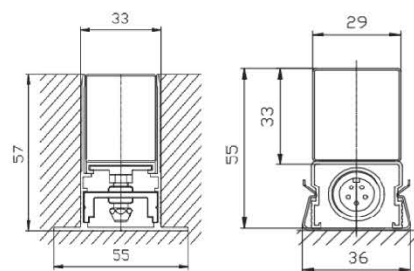

RECESSED
MOUNTED

GENERAL

Rotatable
mounting bracket,
suitable for surface
installation.


Plain installation and
hiding cable scheme
(suitable for narrow
seam installation, wiring
is hidden in lamp body,
more concise)

1. ceiling, wall and ground integrated installation scheme, color uniform, no color difference
2. double extrusion process together, scratch resistant protective layer, wear resistant surface,
3. imported acrylic lampshade, anti UV anti yellowing effect
4. the lampshade adopts sealing thickening process, protection level: IP67/IK10



LED LINEAR LIGHT/UNDERGROUND LIGHT
CUL/CWL-OP-2933

TPK®

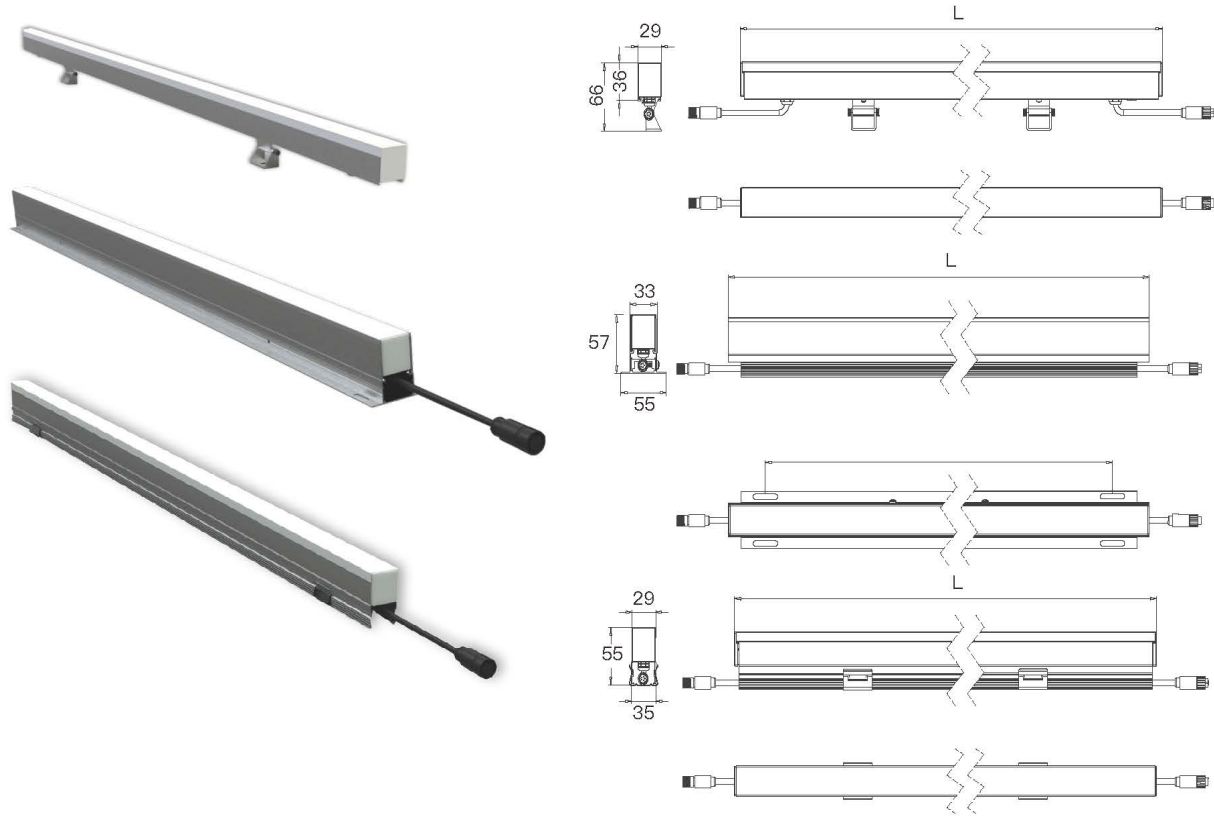

Model	Length	Power(Max)	Colours	Lumen	Mounted Type	Control	Chips Brand	Package
CWL-OP 2933-L5	L500mm	7W	2700K/3000K 4000K/6000K	420 lm	Surface Mounted		EPISTAR	0.38±5%Kg 36 Units/Ctn 103.5*32* 20.5CM
			R+G+B RGBW	175 lm				
CWL-OP 2933-L10	L1000mm	14W	2700K/3000K 4000K/6000K	840 lm	Surface Mounted		OSRAM	0.76±5%Kg 18 Units/Ctn 103.5*32* 20.5CM
			R+G+B RGBW	350 lm				
CUL-OP 2933-L5	L500mm	7W	2700K/3000K 4000K/6000K	420 lm	Buried Mounted		CREE	0.7±5%Kg 30 Units/Ctn 103.5*32* 26.5CM
			R+G+B RGBW	175 lm				
CUL-OP 2933-L10	L1000mm	14W	2700K/3000K 4000K/6000K	840 lm	Buried Mounted		San'an	1.4±5%Kg 15 Units/Ctn 103.5*32* 26.5CM
			R+G+B RGBW	350 lm				

