



LED LINEAR LIGHT
LLS-COVE-W40



- Ceiling slot preferred
- Rotatable regulating bracket
- Embedded installation, seamless stitching
- Multiple control options, DMX,0-10V TRIAC/ELV dimming, DALI, steady on, etc

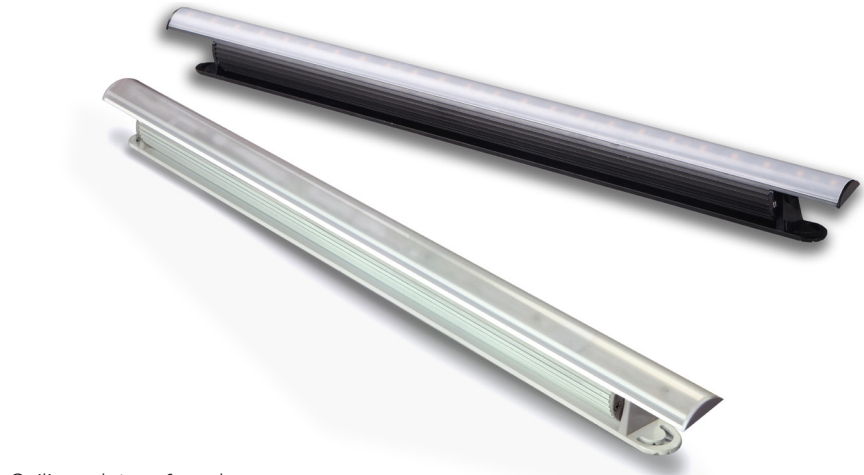

Physical&Installation Dimensions

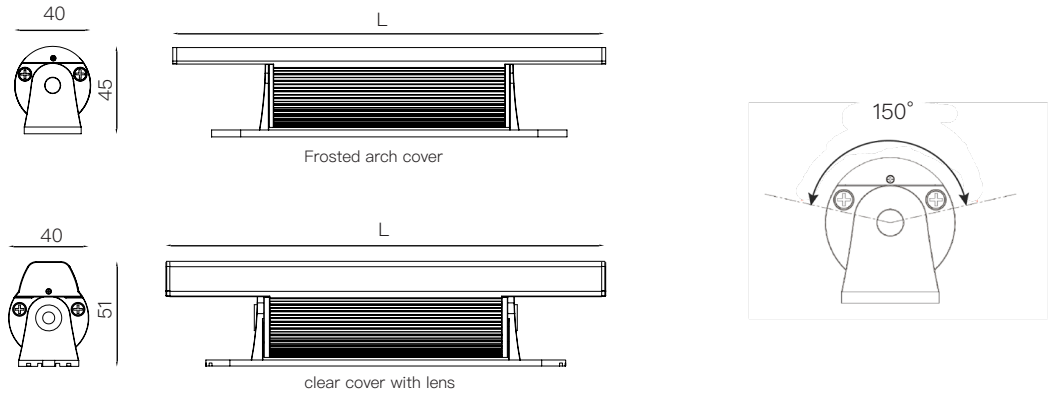

Model Info&Specifications

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LLS-COVE-W40-L3	L300mm	8W	2700K/3000K 4000K/6000K	450 lm 500 lm	15° /25° /35° 20x40° /120°	 	EPISTAR	0.5±5%Kg 12 Units/Ctn 70*27*22CM
			R+G+B RGBW	200 lm 300 lm				
LLS-COVE-W40-L6	L600mm	15W	2700K/3000K 4000K/6000K	750 lm 800 lm			OSRAM CREE San'an	1.0±5%Kg 16Units/Ctn 65.5*42*34.5CM
			R+G+B RGBW	450 lm 550 lm				
LLS-COVE-W40-L12	L1200mm	30W	2700K/3000K 4000K/6000K	1350 lm 1600 lm			BRIDGELUX LUMILEDS	1.6±5%Kg 16Units/Ctn 125.5*42*34.5CM
			R+G+B RGBW	470 lm 1211 lm				

