


UNDERGROUND LIGHT
LUL-R60A/R110/R145A



- Use 316L stainless steel surface cover;
- Structural + gluing double waterproof;
- Multiple selections for size and power, to meet multiple needs;



Physical&Installation Dimensions

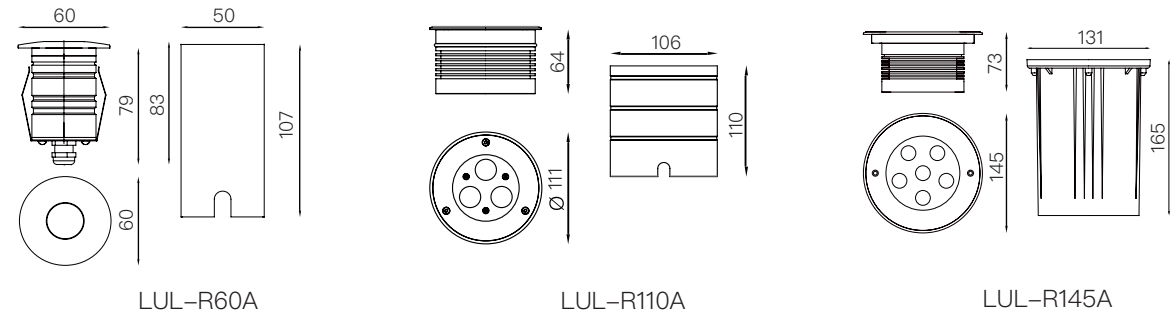

Model Info&Specifications

Model	Diameter	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LUL-R60A-1P	φ60	2.3W	2700K/3000K 4000K/6000K	160 lm	15° /20° 25° /30° 40° /45° 60°		EPISTAR	0.3±5%Kg 50Units/Ctn 38*38*31CM
LUL-R60A-3P	φ60	3W	R+G+B	88 lm				
LUL-R110A-3P	φ111	7W	2700K/3000K 4000K/6000K	630 lm			OSRAM	1.2±5%Kg 18 Units/Ctn 48*48*40CM
LUL-R110A-3P	φ111	9W	RGBW	360 lm				
LUL-R145A-6P	φ145	14W	2700K/3000K 4000K/6000K	690 lm			San'an	1.7±5%Kg 12 Units/Ctn 56*37*45CM
LUL-R145A-18P	φ145	18W	R+G+B	560 lm				
							BRIDGELUX	1.7±5%Kg 4 Units/Ctn 56*37*45CM

