

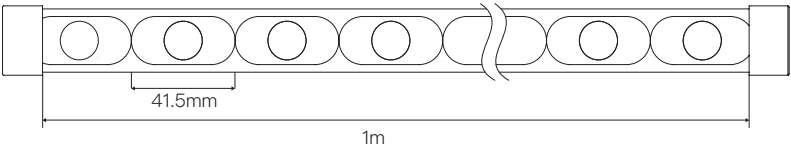
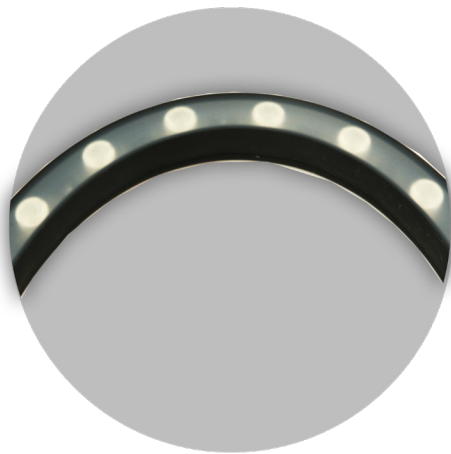
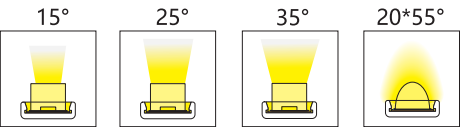


LED FLEXIBLE LIGHT
FWW-SIL-W30

LED with high light 3030/3535 custom light beads
Warm white/positive white/dual color /RGB/RGBW
Many control mode: Switch /SPI/DMX512
silicone material: good flexibility, 360° bending
surface is dustproof and UV resistant
Protection level IP65

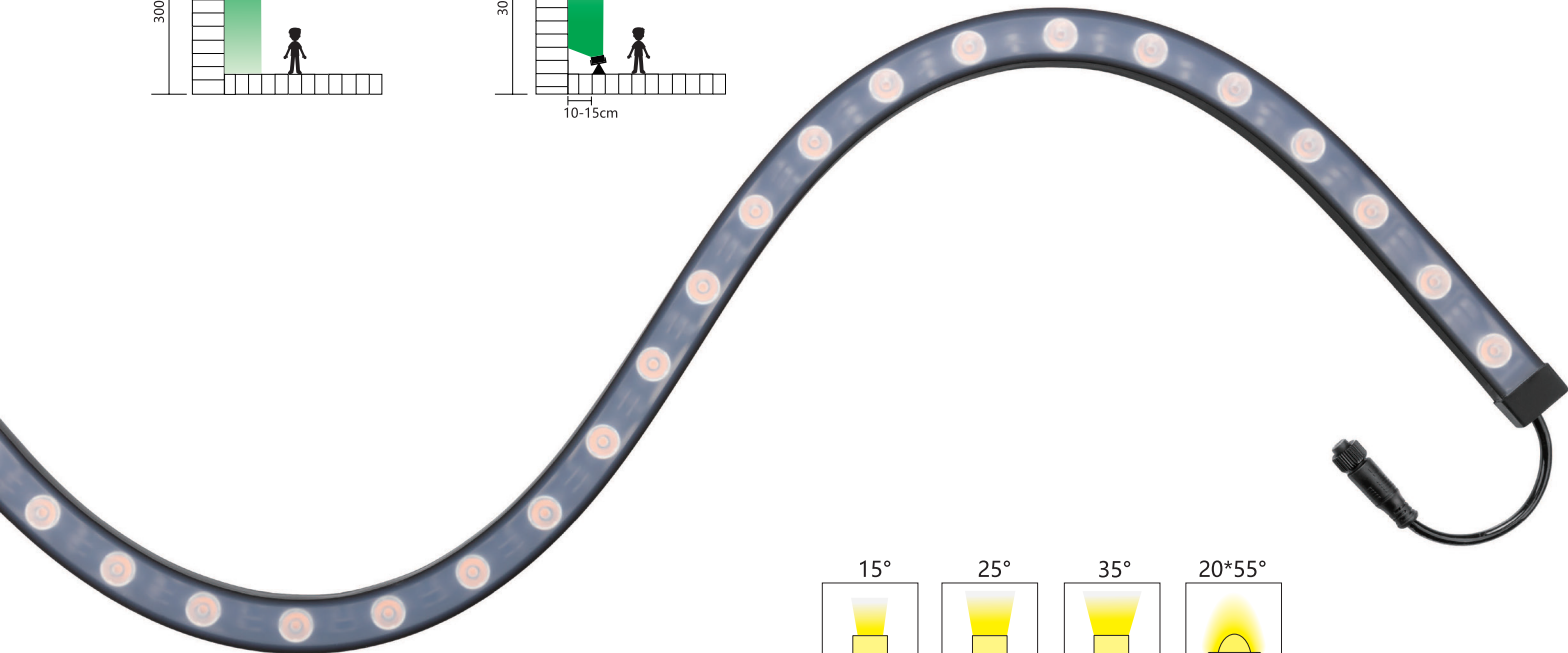


C: RGB R: red G: green B: blueY : yellowA : amber 3000K 4000K 5000K 6000K

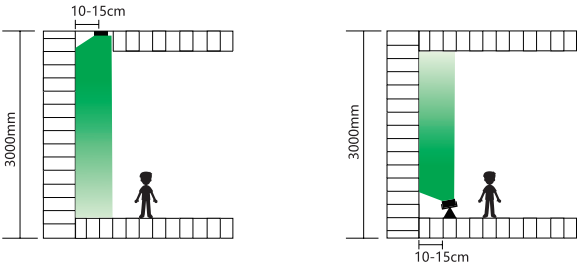




Bending method

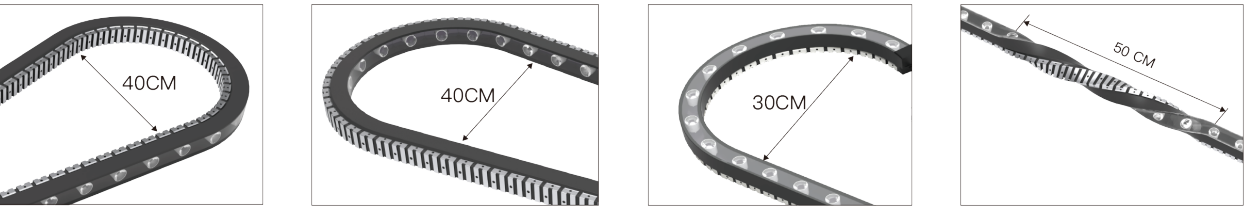


1.Lighting surface outwards, bending inwards with bending diameter <40cm
2.Lighting surface inwards, bending outwards with bending diameter <40cm
3.Lighting surface upwards, bending downwards with bending diameter <40cm
4. Twist-type bending with diameter <50CM.

Installation method

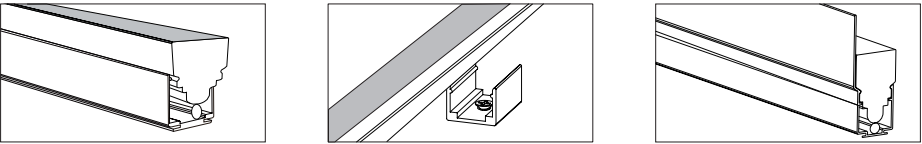

Bottom outlet profiles installation mode.
Bottom outlet buckle installation mode
Bottom with outlet light shade installation mode

LED FLEXIBLE LIGHT
FWW-SIL-W30

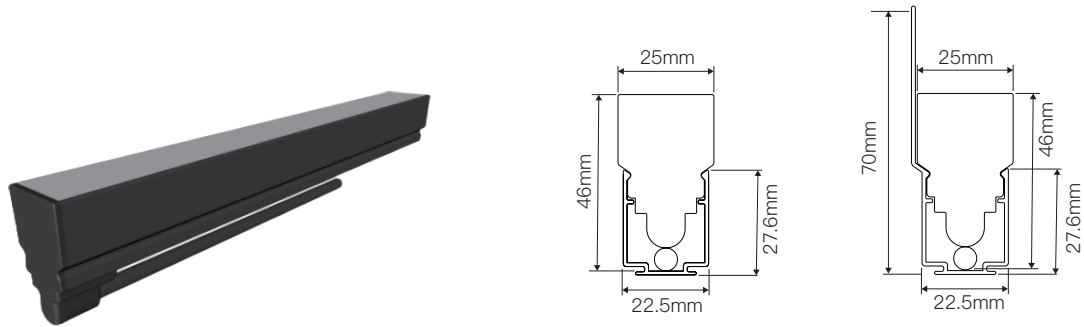

Model Info&Specifications

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
FWW-SIL-W30-24P	L1000mm	24W	2700K/3000K 4000K/6000K	1400 lm 1700 lm	15° /25° /35°	 	 	1.2±5%Kg 25 Units/Ctn 165x165x1225CM
			R+G+B RGBW	750 lm 880 lm	20x40° /120°			
FWW-SIL-W30-12P	L500mm	12W	2700K/3000K 4000K/6000K	720 lm 860 lm	18X20° /10X65°	 	 	0.7±5%Kg 25 Units/Ctn 85x165x1225CM
			R+G+B RGBW	380 lm 450 lm	18X20° /10X65°			

